

# MCC 19 INOX



- Rack 48.26 mm (19") stainless steel version
- Industrial approved components
- Scalable slot CPU modules
- Ideal for hard environments / Solid & robust
- Modular system
- Easy accessibility to integrated components
- 5.25" and 3.5" devices
- Increased security by optional Raid and optional UPS

### Technical data

Slot CPU card (with passive backplane) ..... Intel® Celeron® M 600 MHz up to Intel® Core™ 2 Duo 2.2 GHz  
 or Mainboard ..... on request

Resolution..... 1600x1200 pixel  
 Memory..... up to 2 GByte  
 Hard disk ..... min. 80 GByte (industrial grade 24/7), optional flash disk  
 Raid system..... optional on request (RAID0/1 hard drive mobile rack)  
 Drives..... CD/DVD-ROM, CD/DVD-RW, floppy  
 Standard interfaces ..... COM, LPT, PS/2 mouse and keyboard, Ethernet 10/100 Base-T, VGA, USB  
 Monitoring functions ..... fan, temperature, Watchdog, Status LEDs  
 Backplane Types..... 14 slots, different versions possible  
 ..... (e.g. PCI/ ISA/ PISA)  
 Preloaded operating system..... on customer's request

### Electrical data

Power supply ..... 100-240 VAC, optional 24 VDC  
 UPS (uninterruptible power supply)..... rechargeable battery pack 24 VDC (2.2 Ah)  
 Power consumption ..... depends on construction

### Environmental conditions

EMI ..... DIN EN 61000-6-2: 2006; generic standards – immunity for industrial environments  
 ..... DIN EN 61000-6-4: 2007; generic standards – immunity for industrial environments  
 Operating temperature [°C] ..... 0 ... +50/ Intel® Pentium® 4 types and Intel® Core™ 2 Duo 2.2 GHz types 0 ... +45  
 Storage temperature [°C] ..... -20 ... +60  
 Humidity (rel. %) ..... 90 (non condensing)

### Dimension


Dimension in mm (W/H/D)..... 436 x 174 x 450.5 (19" Rack), 4 HE  
 Weight in kg..... 20

**Customized configurations on request!**

TRsystems GmbH, Eglshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de

### MCC 19 INOX

Drawing

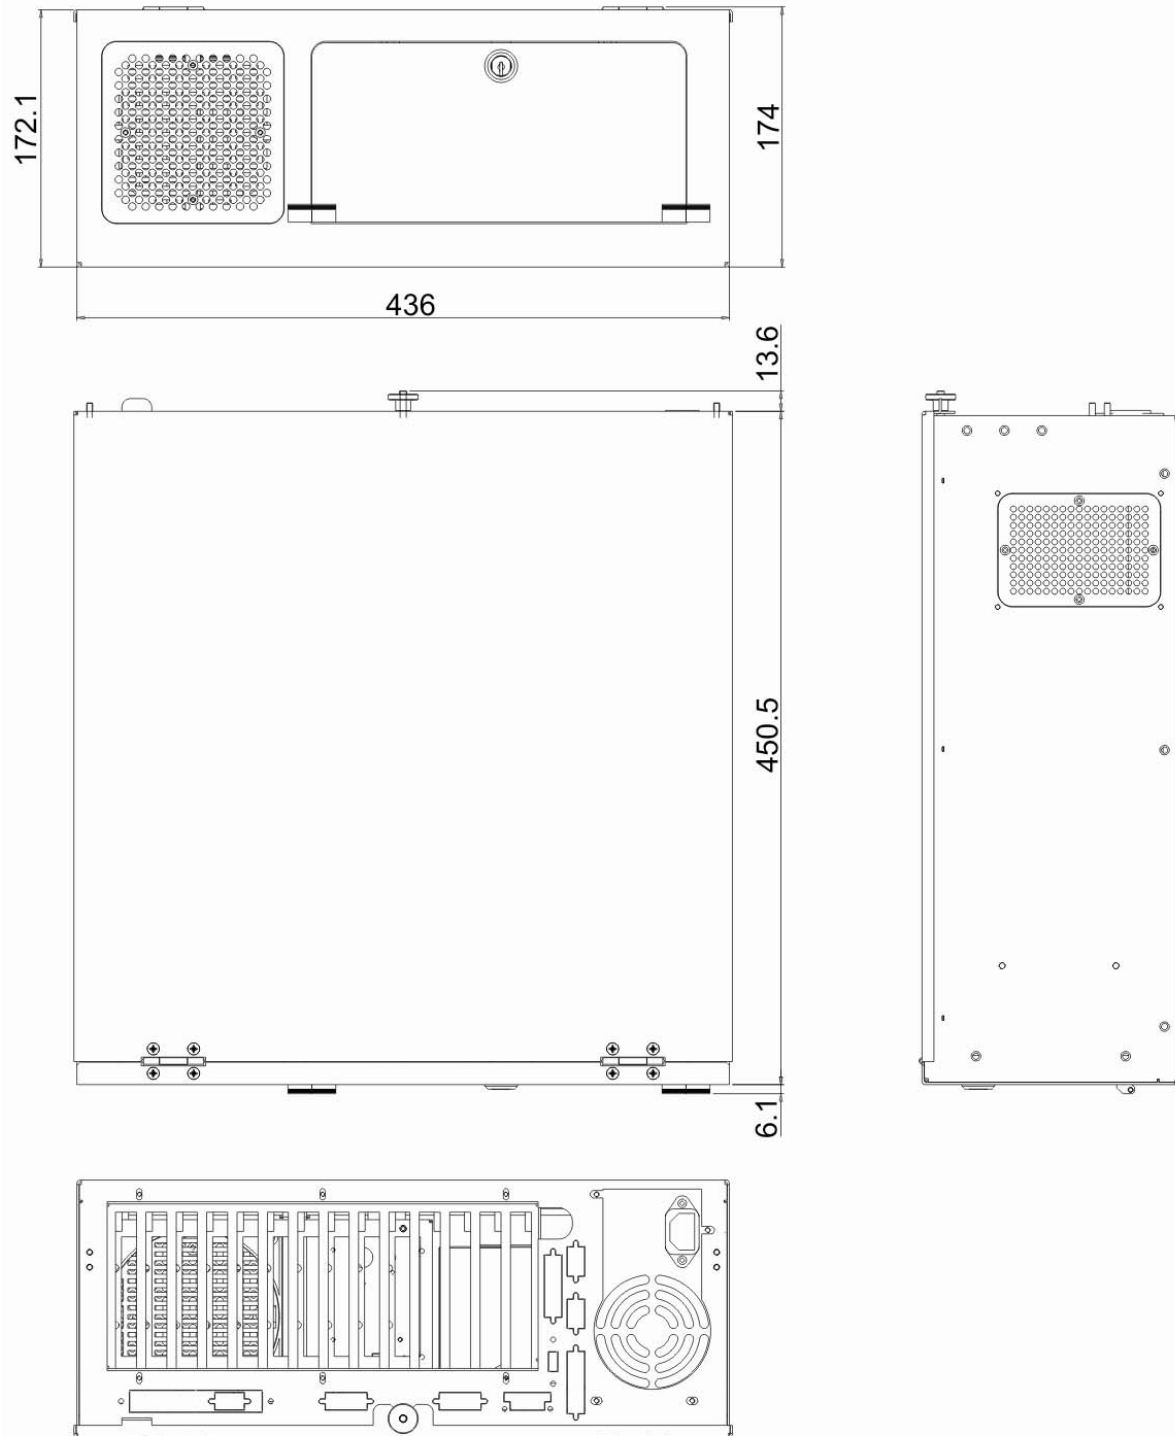

TRsystems GmbH, Eglshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de