

MIPC-L



- Industrial approved components
- Ideal for hard environments / solid & robust
- IP65 front side
- Floating suspension between chassis & mounting / Shock and Vibration approved
- Modular system
- Front side: Floppy, LPT, COM
- Easy accessibility to integrated components
- Active Fan and temperature control

Technical data

Display	381 mm (15.0"), TFT Active Matrix, 250 cd/m ²
Resolution	1024 x 768
Touch screen	not available
Slot CPU Module	starting up from Intel® Pentium® M 600 MHz up to Intel® Core™2 Duo 2.2GHz
Memory	up to 2 GByte
Hard disk	min. 40 GByte (industrial grade 24/7), optional flash disk
Drives	Floppy 1.44 MB
Standard interfaces	COM, LPT, PS/2, Ethernet 10/100 Base-T, VGA, USB
Pointing device	<i>not available in the L version</i>
Monitoring functions	temperature, watchdog, Status LEDs
Backplane types	different versions possible (e.g.: ISA/ PISA/ PCI)
Pre-installed operating system	on customer's request

Electrical data

Power supply	120/ 240 VAC, optional 24 VDC
Power consumption	depends on construction

Environmental conditions

EMI	DIN EN 61000-6-2: 2006; generic standards – immunity for industrial environments
.....	DIN EN 61000-6-4: 2007; generic standards – immunity for industrial environments
Operating temperature [°C]	0 ... +50/ <i>Intel® Pentium® 4 and Intel® Core™ Duo 2.2 GHz types 0 ... +45</i>
Storage temperature [°C]	-20 ... +60
Humidity (rel. %)	90 (non condensing)

Dimension





External Dimension in mm (W/H)	457.5 x 399.25
Cut-out size in mm (W/H)	438 x 380
Deepness in mm	190
Weight in kg	20

Customized configurations on request!

TRsystems GmbH, Eglshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de

MIPC-L

Drawing

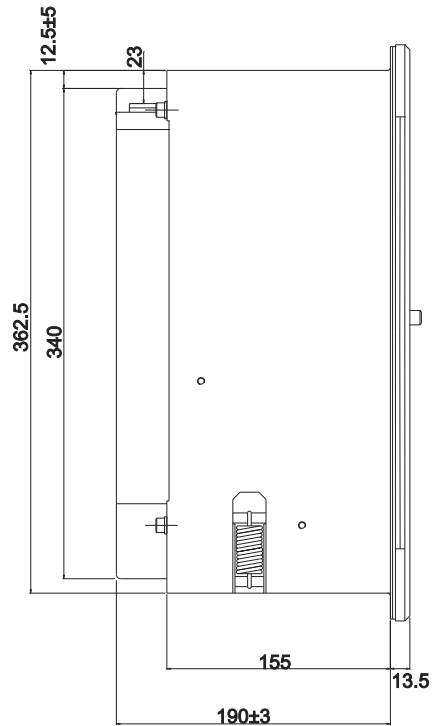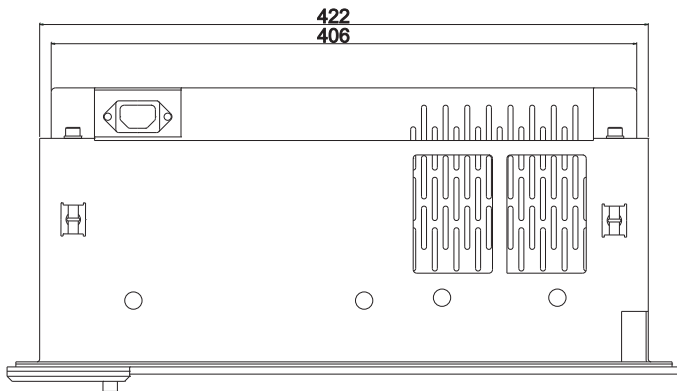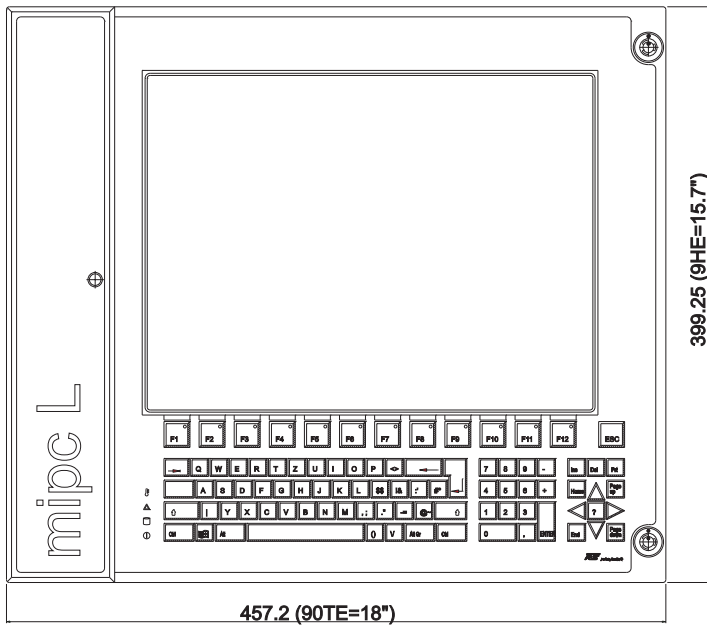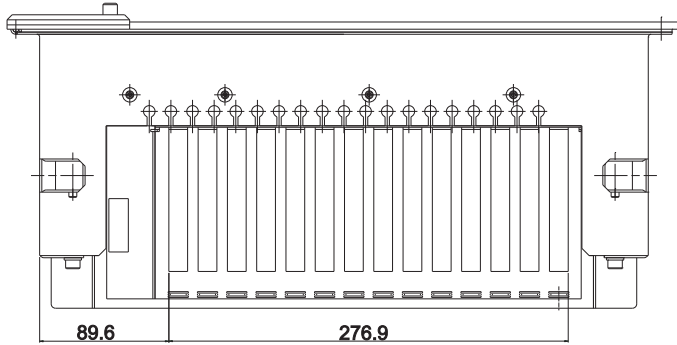

TRsystems GmbH, Eglisshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de